

XD205U / SD205U

The ideal basis for a perfect presentation.



XD205U

The new XD205U/SD205U is a real multi-talent. This entry-level model features much more than an outstanding price-performance ratio: its pin-sharp images in XGA/SVGA resolution make your presentation a true highlight.

Contrast of 2000:1 allows richly detailed pictures. And thanks to 2000 ANSI lumens, you don't even have to dim the room. At only 2.4 kg, this featherweight is especially well suited to mobile use. The vertical Digital Keystone Correction guarantees distortion-free projection, even where the setup is less than perfect.

In addition to its winning image quality, the portable projector shines with exceptional reliability: a lamp service life of up to 3000 hours is a lucid argument in favor of the XD205U/SD205U.

- 0.55" DLP® chip, 12° DDR
- 2000 ANSI lumens
- XD205U: XGA resolution (1024 x 768 pixels)
  SD205U: SVGA resolution (800 x 600 pixels)
- Contrast: 2000:1
- Weight: 2.4 kg
- Password required to prevent unauthorized access

PICTURE BY DLP TEXAS INSTRUMENTS

MITSUBISHI ELECTRIC
Changes for the Better
Electronic Visual Systems



XD205U



XD205U / SD205U

Model	XD205U/SD205U
Technology	0.55" DLP® chip, 12° DDR
Resolution	XD205U: 1024 x 768 (total 786,432 pixels)/SD205U: 800 x 600 (total 480,000 pixels)
Brightness	2000 ANSI lumens
Contrast	2000:1
Colors	16.77 million
Video	XD205U: 550 lines/SD205U: 500 lines
Vertical Frequency (V-Sync)	50–85 Hz
Horizontal Frequency (H-Sync)	15–80 kHz
Band Width	Up to 110 MHz
Projection Lamp	205 W
Lamp Life	approx. 3000 hours (low mode)[1]
Lens	F/2.4, f = 18–21.6 mm
Focus/Zoom	Manual focus and zoom
Zoom Ratio	1.6–1.9:1
Picture Diagonal	1.02–7.62 m
Fan Noise	30 dB (low mode)
Audio Speaker	2 W Mono
PC Compatibility	XD205U: 640 x 480 to 1024 x 768 pixels (compr. 1280 x 1024 pixels), Sync on green available SD205U: 640 x 480 to 800 x 600 pixels (compr. 1024 x 768 pixels), Sync on green available
Video Compatibility	NTSC/NTSC 4.43, PAL (incl. PAL-M, N), SECAM/PAL-60, Comp. Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i, 60 Hz), 1080i (1125i, 50 Hz)
Features	Digital Keystone Correction (vertical), Video-Line Doubler, 3:2 pull-down, height adjustable feet, 3D Y/C, 10-language OSD, PIN-code protection (menu access)
Input Terminals	PC (RGB): 1 x mini-D-sub 15-pin Audio: 1 x stereo-mini-jack (Ø 3.5 mm) Video: 1 x RCA, 1 x S-Video
Output Terminals	PC (RGB): 1 x mni-D-sub 15-pin Audio: 1 x stereo-mini-jack (Ø 3.5 mm)
Communication Terminals	USB terminal for page up/down function
Remote Control	Complete operation of the projector, PowerPoint page up/down via USB
Dimensions (W x H x D)	261 x 88 x 218 mm
Weight	2.4 kg
Power Consumption	approx. 280 W
Power Supply	AC 100–240 V ±10 %, 50/60 Hz
Accessories	Complete cable set, remote control (incl. batteries), soft bag, multilingual operation manual (CD-ROM), Quick-Start Card, safety manual

[1]Depending on the operation environment and application. This is an average value given by the manufacturer based on ideal conditions.

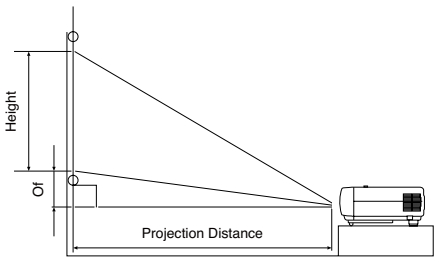

Picture Size			Distance from Screen		Offset (Of)
Diagonal Size cm	Width cm	Height cm	cm/minimal with maximum zoom	cm/maximal with minimum zoom	cm
102	81	61	128	154	8.8
152	122	91	192	230	13.3
203	163	122	256	307	17.7
254	203	152	320	384	22.1
381	305	229	480	576	33.2
508	406	305	640	768	44.2
635	508	381	800	960	55.3
762	610	457	960	–	66.3

(The right to make technical changes is reserved; no liability is accepted for printing or other errors)

Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Str. 8 • D-40880 Ratingen
Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.mitsubishi-evs.de

MITSUBISHI ELECTRIC
Changes for the Better
Electronic Visual Systems