WH_Jade_6_复制.pdf 2011-9-7 18:25:41

Jade
SERIES

Finishes

VENEER

Black Oak

Vintage Cherry

RoseWood

PIANO


Piano Black

Burgundy Burr

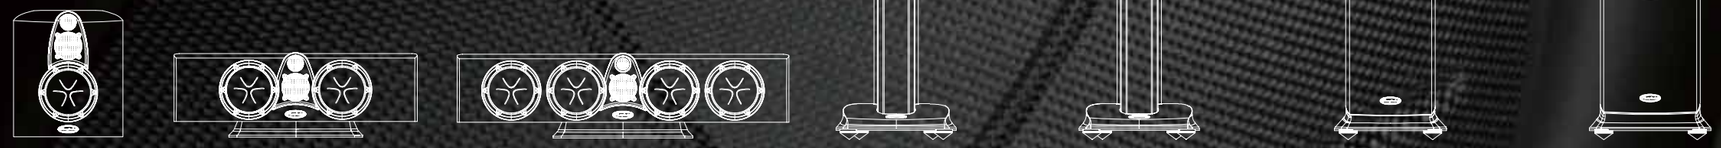

Specifications

	Jade-SR	Jade-C1	Jade-C2	Jade-1	Jade-3	Jade-5	Jade-7
Description/Format	Surround / wall mounting	Centre channel	Centre channel	Stand mounting	Stand mounting	Floorstanding	Floorstanding
Enclosure Type	3-way Closed-box system	3-way Aperiodic system	3-way Aperiodic system	3-way Aperiodic system	3-way Closed-box system	3-way Aperiodic system	4-way Aperiodic system
Drive Units							1" (25mm) Alu high frequency dome
Tweeter	1"(25mm) Alu high dome	1" (25mm) Alu high dome	1" (25mm) Alu high dome	1" (25mm) Alu high dome	1" (25mm) Alu high dome	1" (25mm) Alu high dome	3" (75mm) Alu-pulp cone
Midrange	3"(75mm) Alu high dome	3" (75mm) Alu-pulp cone	3" (75mm) Alu-pulp cone	3" (75mm) Alu-pulp cone	3" (75mm) Alu-pulp cone	3" (75mm) Alu-pulp cone	6.5" (165mm) Acufibre cone
Bass	5"(125mm) Acufibre cone	2 x 5" (125mm) Acufibre cone	4 x 5" (125mm) Acufibre cone	5" (125mm) Acufibre cone	6.5" (165mm) Acufibre cone	2 x 6.5" (165mm) Acufibre cone	2 x 8" (200mm) Acufibre cone
Frequency Response	80Hz - 24kHz (±3dB)	75Hz – 24kHz (±3dB)	55Hz – 24kHz (±3dB)	65Hz – 24kHz (±3dB)	45Hz – 24kHz (±3dB)	42Hz – 24kHz (±3dB)	38Hz – 24kHz (±3dB)
Sensitivity(1W@1M)	85dB	87dB	88dB	85dB	86dB	87dB	88dB
A/V shielded	no	yes	yes	no	no	no	no
Crossover Frequency	710Hz, 3.2kHz	710Hz, 3.2kHz	240Hz, 810Hz, 3.3kHz	570Hz, 2.5kHz	350Hz, 2.8kHz	340Hz, 2.4kHz	180Hz, 590Hz, 2.8kHz
Nominal Impedance	6Ω	6Ω	6Ω	6Ω	6Ω	6Ω	6Ω
Recommended amplifier Power(RMS)	30 - 120W	30 - 150W	50 - 200W	30 - 120W	30 - 150W	50 - 200W	50 - 250W
Dimensions(Height including spikes)	H: 347mm W: 300mm D: 165mm	H: 195mm W: 664mm D: 300mm	H: 195mm W: 914mm D: 300mm	H: 376mm W: 195mm D: 328mm	H: 433mm W: 246mm D: 400mm	H: 1055mm W: 246mm D: 400mm	H: 1180mm W: 273mm D: 448mm
Net weight	6.5kg / pc	13.2kg / pc	18.6kg / pc	8.95kg / pc	11.8kg / pc	27.5kg / pc	37kg / pc
Accessories	rubber feet	rubber feet; optional pedestal available	rubber feet; optional pedestal available	rubber feet; optional stand available	rubber feet; optional stand available	floor spike	floor spike

Specifications are subject to change without prior notice.