


specifications

Blade

Design	Three-way bass reflex, Single Apparent Source driver configuration
Drive units	Uni-Q driver array; MF: 125mm (5in.) Li-Mg-Al /LCP hybrid cone HF: 25mm (1in.) Al dome Bass units: LF: 4 x 225mm (9in.) with force cancelling
Frequency response	40Hz - 35kHz \pm 3dB (-6dB at 28Hz)
Crossover frequencies	350Hz, 2.3kHz
Amplifier requirements	50-400W
Sensitivity (2.83V/1m)	91dB
Maximum output (SPL)	117dB
Nominal impedance	4 Ω (3.0 min.)
Weight	54.5 kg (120 lbs)
Dimensions (H x W x D)	1590 x 363 x 540 mm
Standard finishes	Gloss black or gloss white
Custom colours	Garnet, Sapphire, Grigio, Racing red, Racing blue, Pale gold, Orange sorbet, Graphite, Stardust, Lemon sorbet, Lime sorbet or Diamond black

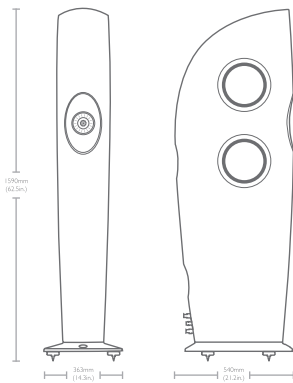

* KEF reserves the right, in line with continuing research and development, to amend or change specifications. E&OE.

