

MC-CX301

Short Throw 3LCD Projector



Introducing our innovative short throw 3LCD MC-CX301 projector which combines all our technical expertise with our market leading knowledge.

This short throw projector can produce 3100 ANSI, has a 10,000:1 contrast ratio and a resolution of 1024 x 768.

So whether you are on the move or in an office, our MC-CX301 short throw projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

XGA 1024 x 768 resolution

3100 ANSI lumens/Colour light output

10,000:1 contrast ratio

Images up to 100" diagonal

Wired LAN, 2 HDMI ports

Filter life 4000 hours

3 year/6 month warranty*


Please note: Content, technical specifications and images are subject to change.

**For education and extended warranties please contact your local dealer.*

MC-CX301 Short Throw 3LCD Projector

Technical Specifications

Panel Size	3LCD 16mm (0.63")	Supported Languages	33 languages: (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese)
Panel Structure	3LCD		
Resolution	XGA (1024 x 768)	Digital Input	HDMI x 2
Light Output (Brightness) ANSI Lumens	3100 (Normal), 2542 (Eco), 2077 (Eco-2)	Analogue Input	15 pin Mini D-Sub x 2, RCA Jack x 1
Contrast Ratio	10,000:1	Video Output	15 pin Mini D-Sub x 1
Lamp Life (Hours)	5000 (Normal), 8000 (Eco), 10000 (Eco-2)	Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Lens	Built-in	Audio Output	3.5mm Stereo Mini Jack x 1
Number of Colours	16.7 million colors	RS-232C Control	1 x 9-pin D-Sub
Lens Zoom	Digital Zoom x 1.35	Wireless LAN	USB-WL-11N wireless adaptor (optional)
Lens Focus	Manual Focus	Wired LAN	Yes
Projection Lens F Number	8.08	USB Type A	USB type A x2 (PCless presentation, wireless adapter or optional pen tablet TB-1)
Focus Distance	0.691 – 1.838m	USB Type B	Used for remote control mouse or PC screen display
Distance to Width Ratio / Throw Ratio (:1)	0.6	Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Diagonal Display Size	60 – 100"	Operating Power Consumption	320W
Speakers	16W mono	Standby Power Consumption	Less than 0.35W
Digital Keystone Correction (Degrees)	Vertical ± 5°	Weight	3.6Kg
Picture Modes	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo	Dimensions (W x H x D)	345 x 85 x 303mm
Picture Adjustments	Aspect Selection (Video, Data, HDMI), Equalizing Digital Gamma Correction, Equalizing Colour Temperature Adjustment, 2-3 Pull Down for NTSC, Mirror Reverse Image, Up-Side Down Image, Progressive Scan	Noise (Normal)	36dB (Normal), 32dB (Eco), 29dB (Eco-2)
Operating Features	MyScreen, My Memory, My Button (by remote control), My Text, My Source, picture modes (normal, cinema, dynamic, blackboard, whiteboard, greenboard, daytime, photo), source naming (English), whiteboard, greenboard, daytime, photo), source naming (English), resolution setting, filter timer, standby audio, template, closed caption (for NTSC & component 480i only), framelock, Eco Mode (normal, eco, intelligent eco, saver), ImageCare™, Accentualizer, HDCR, Image optimizer, Easy Scheduling, Cloning function	Filter Life (Hours)	4000 Hours
Network Features	AMX Device Discovery Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling (backup available), Crestron RoomView® (not accessible through the wireless adapter), Displaying text data transferred via network failure and warning alerts via E-mail, My Image (still image transfer), display, network bridge, network presentation (PC still picture transfer), PJLink™, projector management via SNMP	Certification	UL60950-1/CUL, FCC Part 15 Subpart B Class B, CE Marking: EN61000-3-2, EN61000-3-3, EN55022 (Class B), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE, ROHS, ERP (LOT6) Compliant, C-TICK Class B
Security Features	Security bar, PIN-lock, MyScreen password, key lock (key pad and remote control), Kensington slot, My Text password	Computer	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC16"
		Video	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
		Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, Lens Cap x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, USB Wireless Adapter Cover x1
		Optional Accessories	USB wireless adaptor USB-WL-11N. Wireless pen tablet TB-1.
		Remote Control	HL03035
		Replacement Lamp / Filter	DT01511
		Projector / Lamp Warranty	3 years/6 months (for education and extended warranties please contact your local dealer)

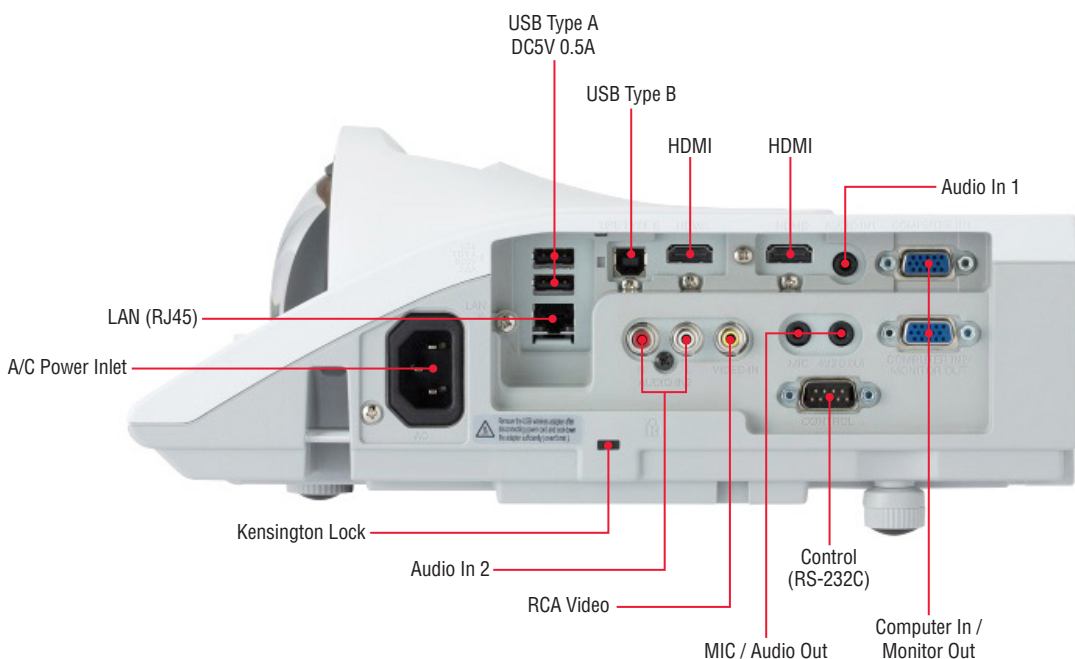

Dealer Stamp

maxell
Within the Future

Maxell Limited
Whitebrook Park
Lower Cookham Road, Maidenhead
Berkshire, SL68YA
Tel: +44 (0)1628 585 000
Fax: +44 (0)1628 585 163
www.maxelldisplay.com